




安徽富信半导体科技有限公司

ANHUI FOSAN SEMICONDUCTOR TECHNOLOGY CO., LTD.

FS2321

**SOT-23 -20V P Channel Enhancement 沟道增强型
MOS Field Effect Transistor 场效应管**

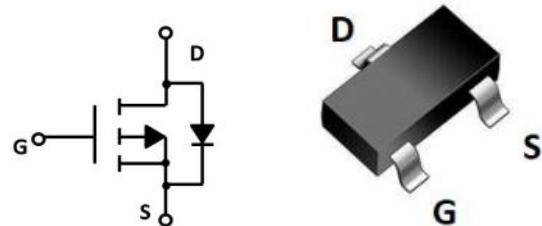

■ Absolute Maximum Ratings 最大额定值

Characteristic 特性参数	Symbol 符号	Rating 额定值	Unit 单位
Drain-Source Voltage 漏极-源极电压	BV_{DSS}	-20	V
Gate- Source Voltage 栅极-源极电压	V_{GS}	± 10	V
Drain Current (continuous)漏极电流-连续	I_D (at $T_A = 25^\circ C$)	-3.4	A
Drain Current (pulsed)漏极电流-脉冲	I_{DM}	-13	A
Total Device Dissipation 总耗散功率	P_D (at $T_A = 25^\circ C$)	1000	mW
Thermal Resistance Junction-Ambient 热阻	$R_{\theta JA}$	125	$^\circ C/W$
Junction/Storage Temperature 结温/储存温度	T_J, T_{stg}	-55~150	$^\circ C$

■ Device Marking 产品字标

FS2321M=A5SHB



安徽富信半导体科技有限公司

ANHUI FOSAN SEMICONDUCTOR TECHNOLOGY CO., LTD.

FS2321M

■ Electrical Characteristics 电特性

($T_A=25^\circ\text{C}$ unless otherwise noted 如无特殊说明, 温度为 25°C)

Characteristic 特性参数	Symbol 符号	Min 最小值	Typ 典型值	Max 最大值	Unit 单位
Drain-Source Breakdown Voltage 漏极-源极击穿电压($I_D = -250\mu\text{A}, V_{GS} = 0\text{V}$)	BV_{DSS}	-20	—	—	V
Gate Threshold Voltage 栅极开启电压($I_D = -250\mu\text{A}, V_{GS} = V_{DS}$)	$V_{GS(\text{th})}$	-0.4	-0.62	-1	V
Zero Gate Voltage Drain Current 零栅压漏极电流($V_{GS} = 0\text{V}, V_{DS} = -20\text{V}$)	I_{DSS}	—	—	1	μA
Gate Body Leakage 栅极漏电流($V_{GS} = \pm 10\text{V}, V_{DS} = 0\text{V}$)	I_{GSS}	—	—	± 100	nA
Static Drain-Source On-State Resistance 静态漏源导通电阻($I_D = -3.4\text{A}, V_{GS} = -4.5\text{V}$) ($I_D = -3\text{A}, V_{GS} = -2.5\text{V}$) ($I_D = -2.5\text{A}, V_{GS} = -1.8\text{V}$)	$R_{DS(\text{ON})}$	—	49 59 79	64 80 110	$\text{m}\Omega$
Diode Forward Voltage Drop 内附二极管正向压降($I_{SD} = -3.4\text{A}, V_{GS} = 0\text{V}$)	V_{SD}	—	—	-1.2	V
Input Capacitance 输入电容 ($V_{GS} = 0\text{V}, V_{DS} = -10\text{V}, f = 1\text{MHz}$)	C_{ISS}	—	438	—	pF
Common Source Output Capacitance 共源输出电容($V_{GS} = 0\text{V}, V_{DS} = -10\text{V}, f = 1\text{MHz}$)	C_{OSS}	—	76	—	pF
Reverse Transfer Capacitance 反馈电容($V_{GS} = 0\text{V}, V_{DS} = -10\text{V}, f = 1\text{MHz}$)	C_{RSS}	—	62	—	pF
Total Gate Charge 栅极电荷密度 ($V_{DS} = -10\text{V}, I_D = -2\text{A}, V_{GS} = -4.5\text{V}$)	Q_g	—	5.4	—	nC
Gate Source Charge 栅源电荷密度 ($V_{DS} = -10\text{V}, I_D = -2\text{A}, V_{GS} = -4.5\text{V}$)	Q_{gs}	—	1.2	—	nC
Gate Drain Charge 栅漏电荷密度 ($V_{DS} = -10\text{V}, I_D = -2\text{A}, V_{GS} = -4.5\text{V}$)	Q_{gd}	—	1.2	—	nC
Turn-ON Delay Time 开启延迟时间 ($V_{DS} = -10\text{V}, I_D = -1\text{A}, R_{\text{GEN}} = 2.5\Omega, V_{GS} = -4.5\text{V}$)	$t_{d(\text{on})}$	—	7	—	ns
Turn-ON Rise Time 开启上升时间 ($V_{DS} = -10\text{V}, I_D = -1\text{A}, R_{\text{GEN}} = 2.5\Omega, V_{GS} = -4.5\text{V}$)	t_r	—	22	—	ns
Turn-OFF Delay Time 关断延迟时间 ($V_{DS} = -10\text{V}, I_D = -1\text{A}, R_{\text{GEN}} = 2.5\Omega, V_{GS} = -4.5\text{V}$)	$t_{d(\text{off})}$	—	38	—	ns
Turn-OFF Fall Time 关断下降时间 ($V_{DS} = -10\text{V}, I_D = -1\text{A}, R_{\text{GEN}} = 2.5\Omega, V_{GS} = -4.5\text{V}$)	t_f	—	35	—	ns

■ Typical Characteristic Curve 典型特性曲线

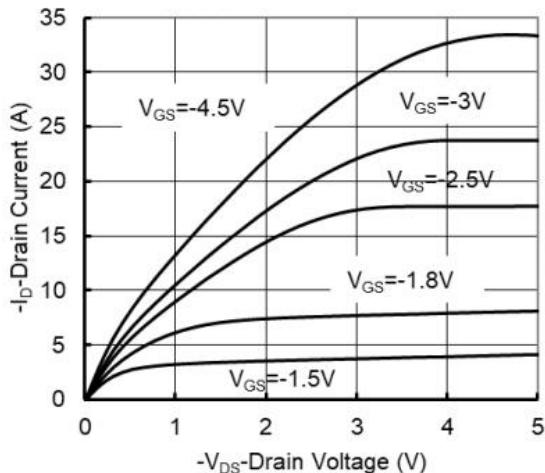


Figure 1: Output Characteristics

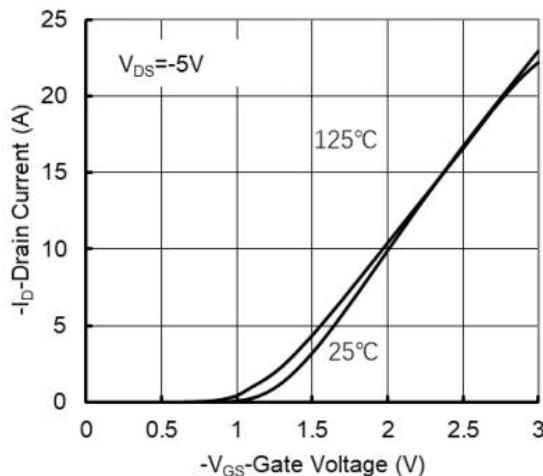


Figure 2: Transfer Characteristics

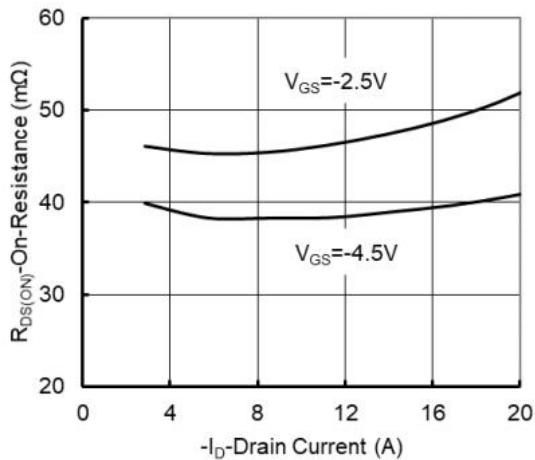


Figure 3: On-Resistance vs. Drain Current

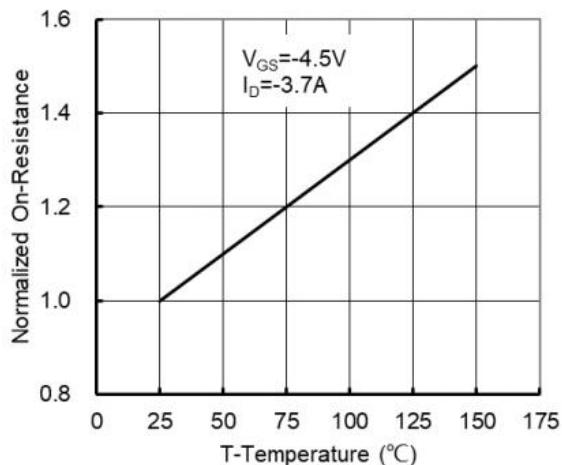


Figure 4: On-Resistance vs. Temperature

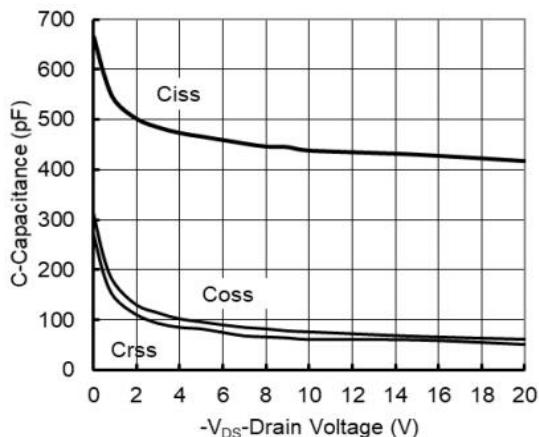


Figure 5: Capacitance Characteristics

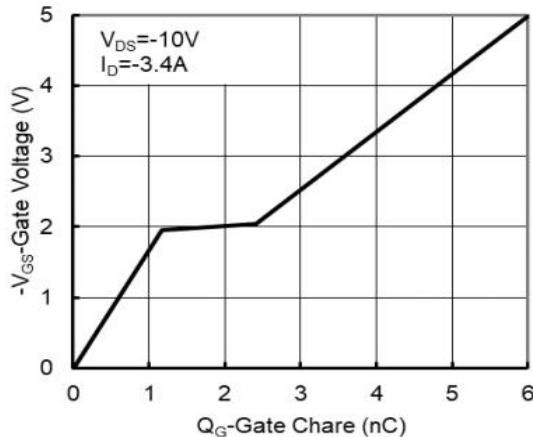


Figure 6: Gate-Charge Characteristics

■ Typical Characteristic Curve 典型特性曲线

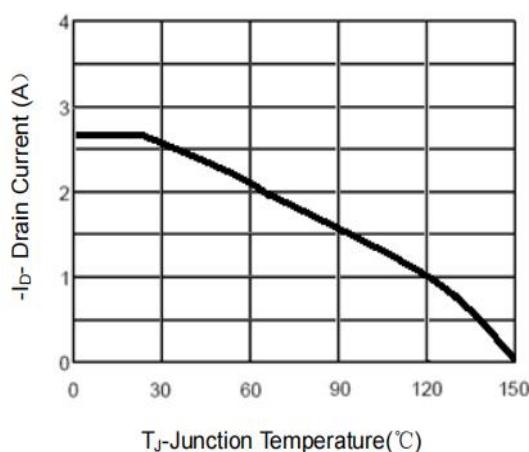


Figure 7: Drain Current vs. Temperature

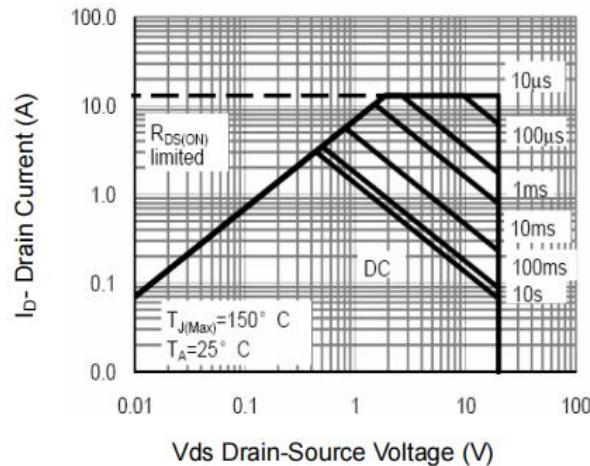


Figure 8: Safe Operating Area


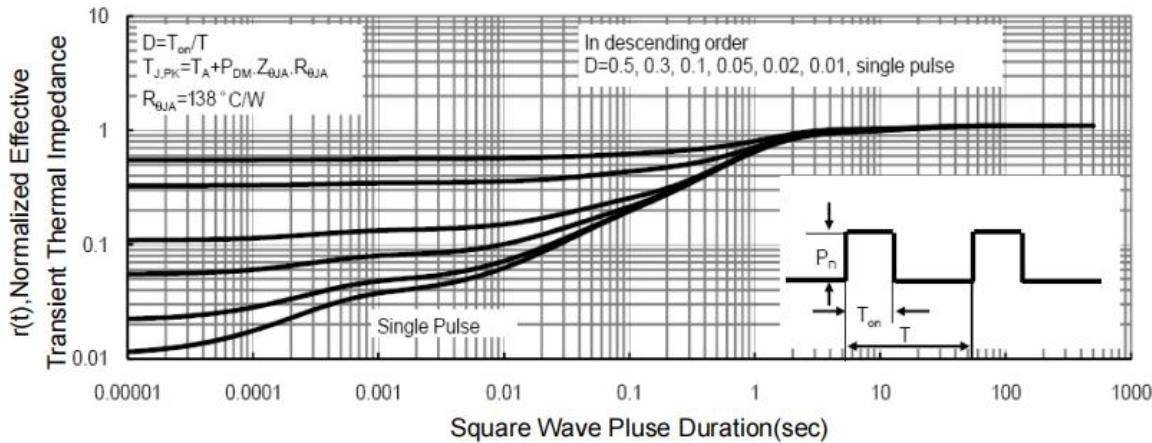


Figure 9: Transient Thermal Response Curve

■ Dimension 外形封装尺寸

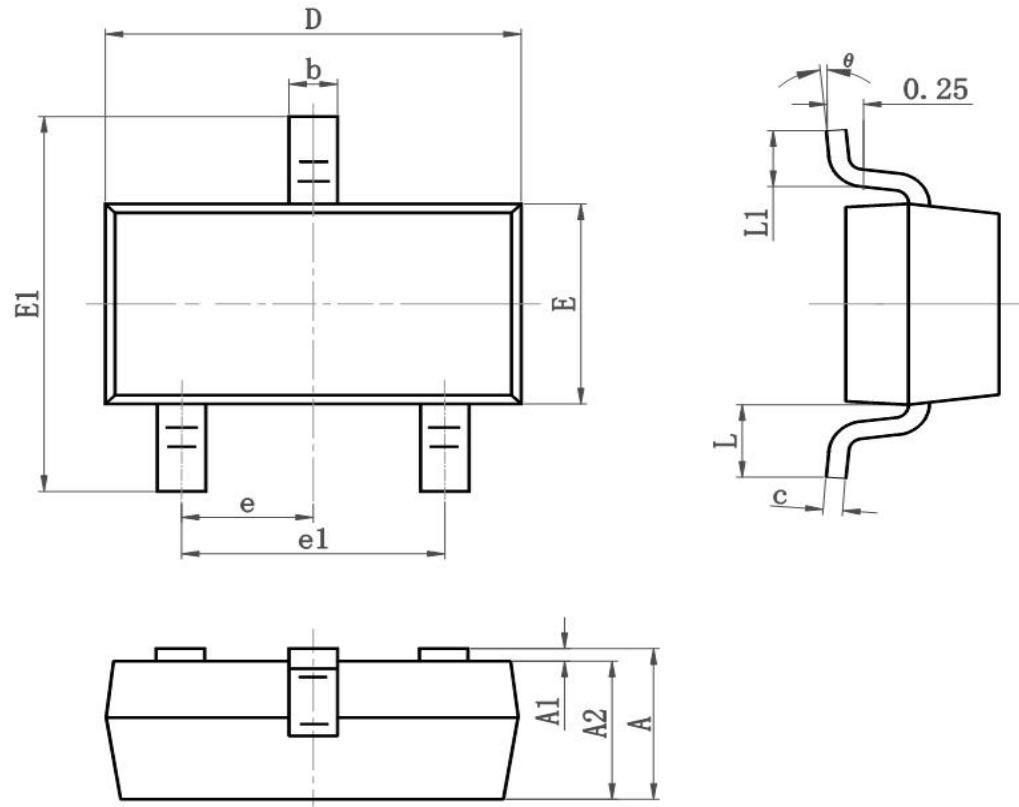

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.050	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°