

## SOP-8 30V Dual N Channel Enhancement 双 N 沟道增强型 MOS Field Effect Transistor 场效应管



### ■ Features 特点

Low on-resistance 低导通电阻  
 $R_{DS(ON)}=23m\Omega(\text{Type})@V_{GS}=10V$   
 $R_{DS(ON)}=27m\Omega(\text{Type})@V_{GS}=4.5V$   
 $R_{DS(ON)}=35m\Omega(\text{Type})@V_{GS}=2.5V$

### ■ Applications 应用

Portable Equipment 桌面设备  
 Battery Powered System 电池电源系统  
 Power Management in Note Book 笔记本电源管理

### ■ Internal Schematic Diagram 内部结构



### ■ Absolute Maximum Ratings 最大额定值

Characteristic 特性参数	Symbol 符号	Rat 额定值	Unit 单位
Drain-Source Voltage 漏极-源极电压	$BV_{DSS}$	30	V
Gate- Source Voltage 栅极-源极电压	$V_{GS}$	$\pm 12$	V
Drain Current (continuous)漏极电流-连续	$I_D$ (at $T_A = 25^\circ\text{C}$ )	8	A
Drain Current (pulsed)漏极电流-脉冲	$I_{DM}$	40	A
Total Device Dissipation 总耗散功率	$P_D$ (at $T_A = 25^\circ\text{C}$ )	1700	mW
Thermal Resistance Junction-Ambient 热阻	$R_{\theta JA}$	73.5	$^\circ\text{C}/\text{W}$
Junction/Storage Temperature 结温/储存温度	$T_J, T_{stg}$	-55~150	$^\circ\text{C}$



## ■ Electrical Characteristics 电特性

( $T_A=25^{\circ}\text{C}$  unless otherwise noted 如无特殊说明, 温度为  $25^{\circ}\text{C}$ )

Characteristic 特性参数	Symbol 符号	Min 最小值	Typ 典型值	Max 最大值	Unit 单位
Drain-Source Breakdown Voltage 漏极-源极击穿电压( $I_D=250\mu\text{A}, V_{GS}=0\text{V}$ )	$BV_{DSS}$	30	—	—	V
Gate Threshold Voltage 栅极开启电压( $I_D=250\mu\text{A}, V_{GS}=V_{DS}$ )	$V_{GS(th)}$	0.6	0.9	1.5	V
Zero Gate Voltage Drain Current 零栅压漏极电流( $V_{GS}=0\text{V}, V_{DS}=24\text{V}$ )	$I_{DSS}$	—	—	1	$\mu\text{A}$
Gate Body Leakage 栅极漏电流( $V_{GS}=\pm 12\text{V}, V_{DS}=0\text{V}$ )	$I_{GSS}$	—	—	$\pm 100$	nA
Static Drain-Source On-State Resistance 静态漏源导通电阻( $I_D=8\text{A}, V_{GS}=10\text{V}$ ) ( $I_D=7\text{A}, V_{GS}=4.5\text{V}$ ) ( $I_D=7\text{A}, V_{GS}=2.5\text{V}$ )	$R_{DS(ON)}$	—	23 27 35	28 37 45	$\text{m}\Omega$
Diode Forward Voltage Drop 内附二极管正向压降( $I_{SD}=1\text{A}, V_{GS}=0\text{V}$ )	$V_{SD}$	—	0.7	1.1	V
Input Capacitance 输入电容 ( $V_{GS}=0\text{V}, V_{DS}=15\text{V}, f=1\text{MHz}$ )	$C_{ISS}$	—	580	—	pF
Common Source Output Capacitance 共源输出电容( $V_{GS}=0\text{V}, V_{DS}=15\text{V}, f=1\text{MHz}$ )	$C_{OSS}$	—	95	—	pF
Reverse Transfer Capacitance 反馈电容 ( $V_{GS}=0\text{V}, V_{DS}=15\text{V}, f=1\text{MHz}$ )	$C_{RSS}$	—	57	—	pF
Total Gate Charge 栅极电荷密度 ( $V_{DS}=15\text{V}, I_D=8\text{A}, V_{GS}=4.5\text{V}$ )	$Q_g$	—	6	—	nC
Gate Source Charge 栅源电荷密度 ( $V_{DS}=15\text{V}, I_D=8\text{A}, V_{GS}=4.5\text{V}$ )	$Q_{gs}$	—	2	—	nC
Gate Drain Charge 栅漏电荷密度 ( $V_{DS}=15\text{V}, I_D=8\text{A}, V_{GS}=4.5\text{V}$ )	$Q_{gd}$	—	2	—	nC
Turn-ON Delay Time 开启延迟时间 ( $V_{DS}=15\text{V}, I_D=1\text{A}, R_{GEN}=6\Omega, V_{GS}=10\text{V}$ )	$t_{d(on)}$	—	6	—	ns
Turn-ON Rise Time 开启上升时间 ( $V_{DS}=15\text{V}, I_D=1\text{A}, R_{GEN}=6\Omega, V_{GS}=10\text{V}$ )	$t_r$	—	12	—	ns
Turn-OFF Delay Time 关断延迟时间 ( $V_{DS}=15\text{V}, I_D=1\text{A}, R_{GEN}=6\Omega, V_{GS}=10\text{V}$ )	$t_{d(off)}$	—	18	—	ns
Turn-OFF Fall Time 关断下降时间 ( $V_{DS}=15\text{V}, I_D=1\text{A}, R_{GEN}=6\Omega, V_{GS}=10\text{V}$ )	$t_f$	—	5	—	ns

## ■ Typical Characteristic Curve 典型特性曲线

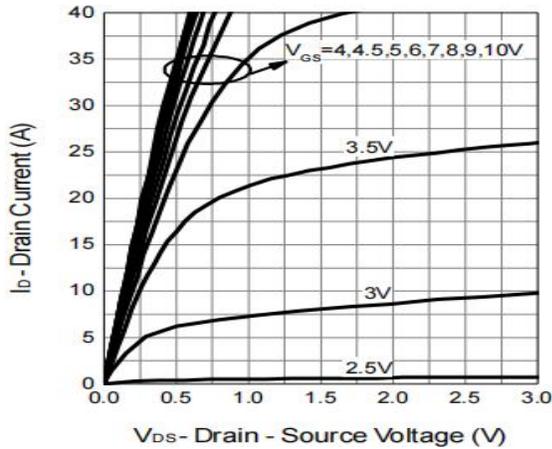


Figure 1: Output Characteristics

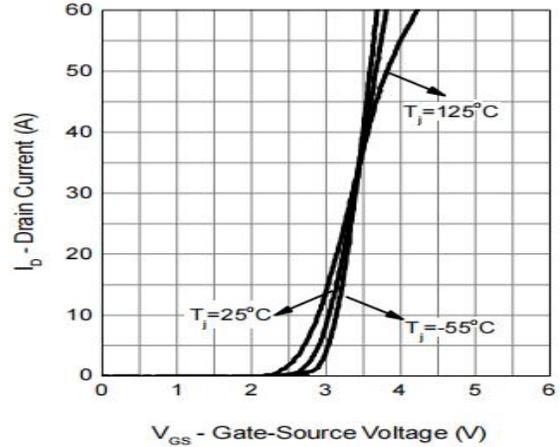


Figure 2: Transfer Characteristics

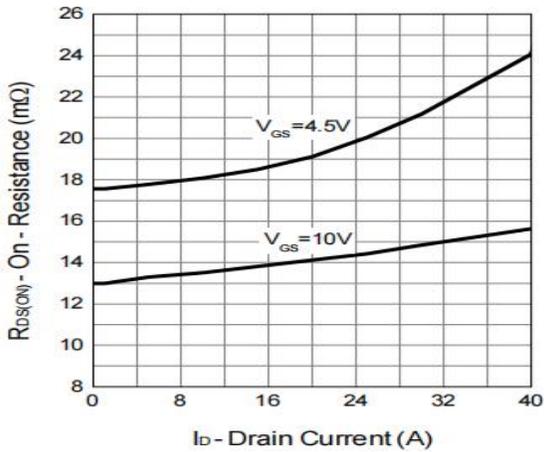


Figure 3: On-Resistance vs. Drain Current

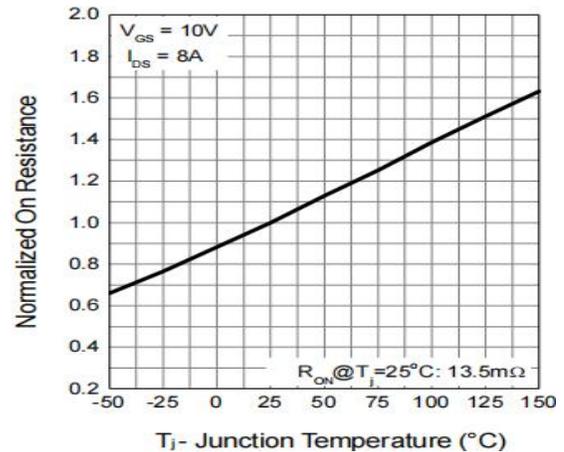


Figure 4: On-Resistance vs. Temperature

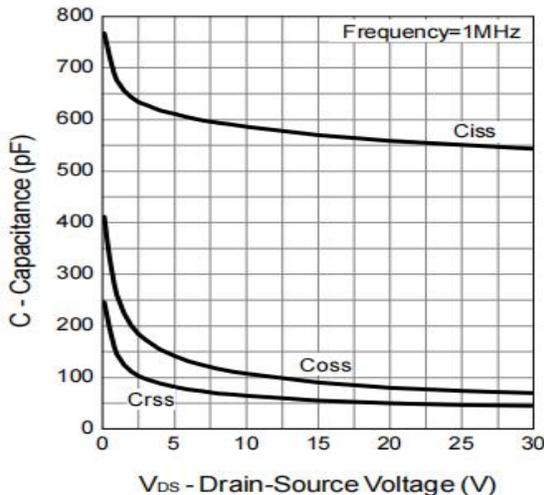


Figure 5: Capacitance Characteristics

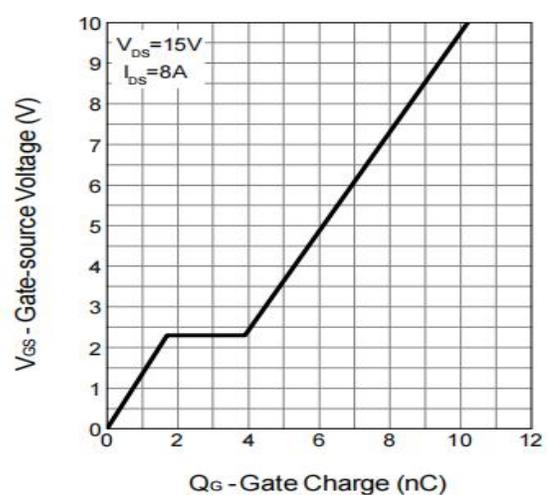


Figure 6: Gate-Charge Characteristics

## Typical Characteristic Curve 典型特性曲线

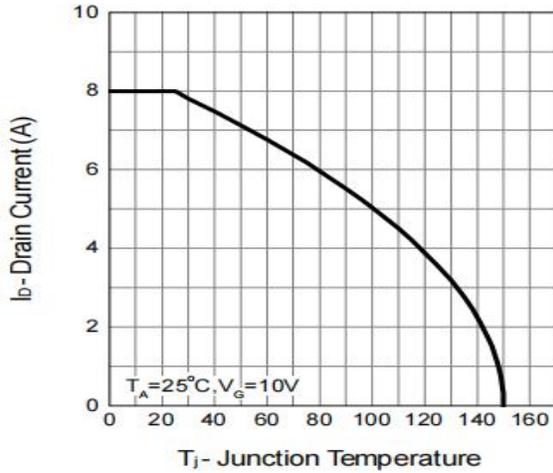


Figure 7: Drain Current vs. Temperature

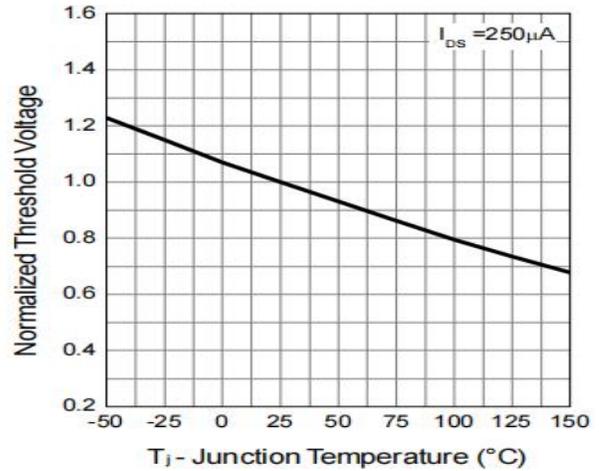


Figure 8: Threshold Voltage vs. Temperature

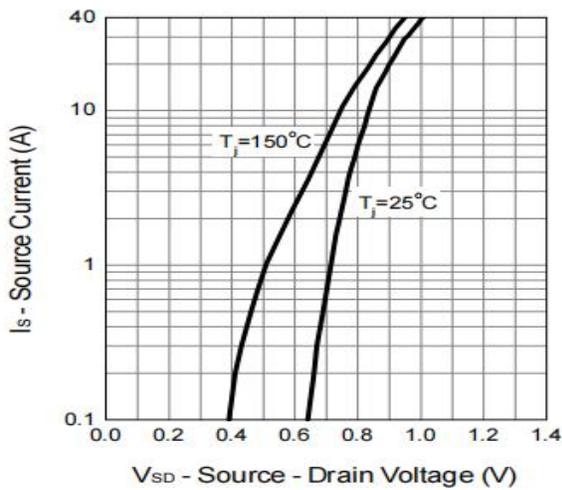


Figure 9: Diode Characteristics

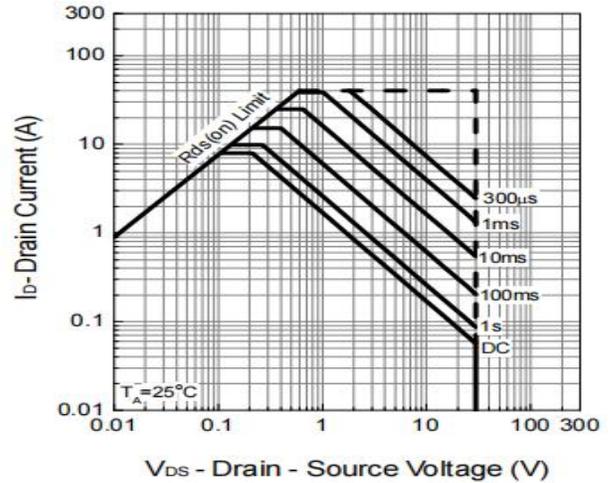


Figure 10: Safe Operating Area


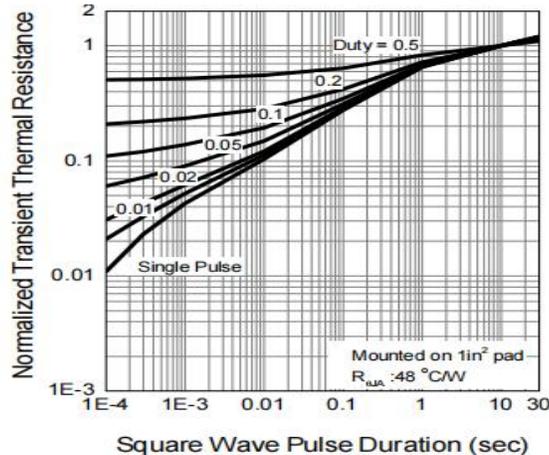


Figure 11: Transient Thermal Response Curve

## Dimension 外形封装尺寸

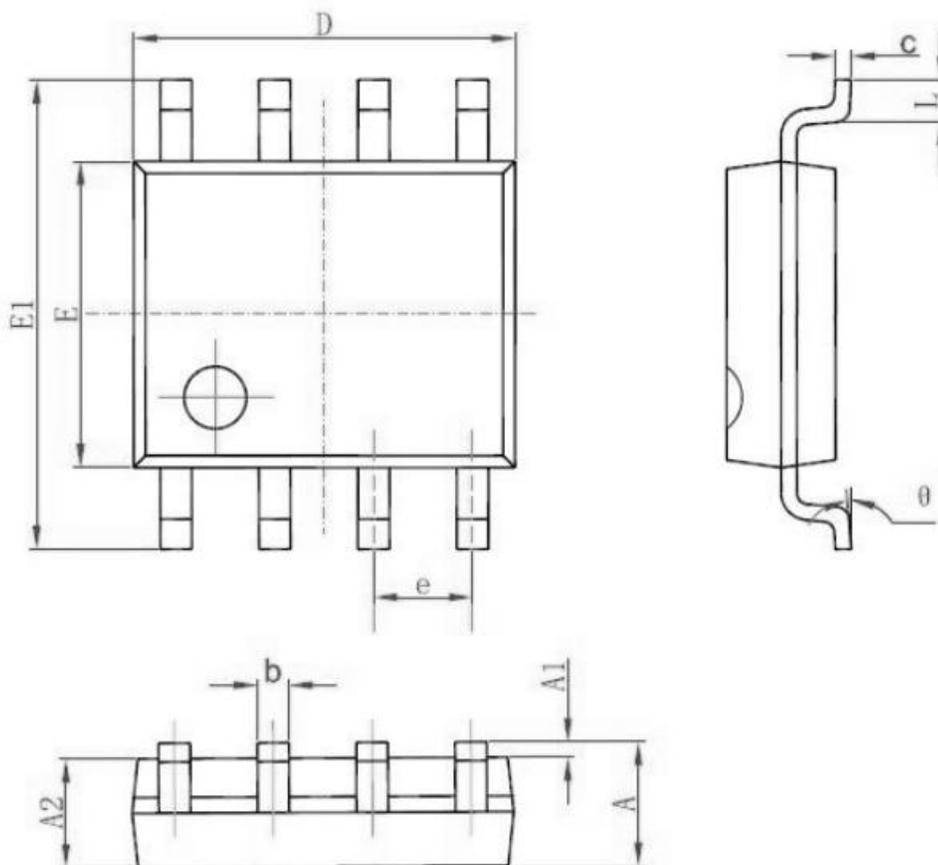

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270 (BSC)		0.050 (BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°