



## SOT-23-3L Three Terminal Regulator 三端稳压 IC

### ■ Features 特点

**Low Dropout Voltage 低落差电压**

1.Vss/Adj 2.Vo 3.Vi

### ■ Application 应用


PC Motherboard 主板

LCD Monitor 液晶屏

Graphic Card 显卡

Modem 调制解调器

Printer 打印机



### ■ Absolute Maximum Ratings 最大额定值

(TA=25°C unless otherwise noted 如无特殊说明, 温度为 25°C)

Characteristic 特性参数	Symbol 符号	Rat 额定值	Unit 单位
Input Voltage 输入电压	V <sub>i</sub>	15	V
Operating Current 工作电流	I <sub>o</sub>	1000	mA
Thermal Resistance Junction-Ambient 热阻	R <sub>θJA</sub>	250	°C/W
Solder Temperature 焊接温度	T <sub>d</sub>	260	°C
Solder Time 焊接时间	T <sub>d</sub>	10	S
Operating Ambient Temperature 工作温度	T <sub>A</sub>	+85	°C
Junction and Storage Temperature 结温和储藏温度	T <sub>J</sub> , T <sub>stg</sub>	-40to+125°C	




## ■Electrical Characteristics 电特性

( $V_{IN} \leq 10V$   $T_J = 25^\circ C$  unless otherwise noted 如无特殊说明)

Characteristic 特性参数	Symbol 符号	Part No. 料号	Test Condition 测试条件	Min 最小值	Type 典型值	Max 最大值	Unit 单位
Reference Voltage 基准电压	$V_{RO}$	1117-Adj	$I_O=10mA$ $V_I-V_O=3.23$	1.231	1.250	1.269	V
			$10mA \leq I_O \leq 0.8A$ $2.75 \leq V_I - V_O \leq 3.25$	1.225	1.250	1.275	
Output Voltage 输出电压	$V_O$	1117-1.8	$I_O=10mA$ $V_I=3.8$	1.773	1.8	1.827	V
			$10mA \leq I_O \leq 0.8A$ $3.3 \leq V_I \leq 12$	1.764	1.8	1.836	
		1117-2.5	$I_O=10mA$ $V_I=4.5$	2.463	2.5	2.538	
			$10mA \leq I_O \leq 0.8A$ $4 \leq V_I \leq 12$	2.450	2.5	2.550	
		1117-3.3	$I_O=10mA$ $V_I=5.3$	3.251	3.3	3.350	
			$10mA \leq I_O \leq 0.8A$ $4.8 \leq V_I \leq 12$	3.234	3.3	3.366	
		1117-5.0	$I_O=10mA$ $V_I=7$	4.925	5.0	5.075	
			$10mA \leq I_O \leq 0.8A$ $6.5 \leq V_I \leq 12$	4.9	5.0	5.1	
Line Regulation 线性调整率	LNR	1117-Adj	$I_O=10mA$ $1.5 \leq V_I - V_O \leq 12$		0.03	0.2	%
		1117-1.8	$I_O=10mA$ $1.5 \leq V_I - V_O \leq 10.2$		1	7	mV
		1117-2.5	$I_O=10mA$ $1.5 \leq V_I - V_O \leq 9.5$		1	7	
		1117-3.3	$I_O=10mA$ $1.5 \leq V_I - V_O \leq 8.7$		1	7	
		1117-5.0	$I_O=10mA$ $1.5 \leq V_I - V_O \leq 7$		1	10	
Load Regulation 负载调整率	LDR	1117-Adj	$10mA \leq I_O \leq 0.8A$ $V_I - V_O = 1.5$		0.2	0.4	%
		1117-1.8				7.2	mV
		1117-2.5				10	
		1117-3.3				13.2	
		1117-5.0				20	
Dropout Voltage	$V_D$	落差电压	$\Delta V_R = 1\%$ $I_O = 0.8A$		1.2	1.3	V
Adjust Pin Current	$I_{adj}$	电流调整	$I_O = 10mA$			120	$\mu A$
Adjust Current Change	$\Delta I_{adj}$	电流调整率	$1.5 \leq V_I - V_O \leq 12$ $I_O = 10mA$			5	$\mu A$
Min Load Current	$I_L$	负载电流	$V_I = 5V$ $V_{adj} = 0V$			7	mA
Quiescent Current	$I_q$	静态电流	$V_I = V_O + 1.25$		2	5	mA
Temperature Stability 温度稳定性					0.5		%
Long Term Stability 长期稳定性			$T_A = 125^\circ C$ 1000hrs		0.3		%
RMS Output Noise(% of Vout)输出噪声			$T_A = 125^\circ C$		0.003		%
Thermal Shutdown Hysteresis 热特性					25		$^\circ C$

## ■SOT-23-3L Dimension 外形封装尺寸

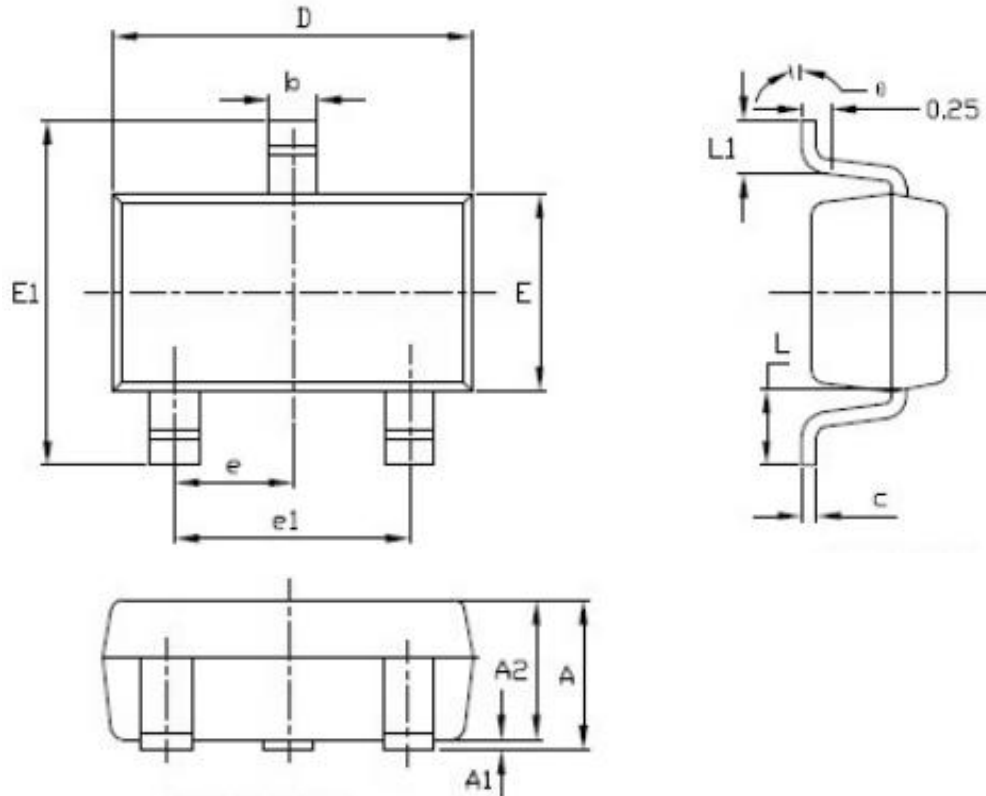

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.600REF		0.024REF	
L1	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°