

SOD-123FL Schottky Barrier Rectifier Diode 肖特基势垒整流二极管**■Features 特点**

Low forward voltage drop 低正向压降

High current capability 高电流能力

Surface mount device 表面贴装器件

Case 封装:SOD-123FL

**■Maximum Rating 最大额定值**

(TA=25°C unless otherwise noted 如无特殊说明, 温度为 25°C)





Characteristic 特性参数	Symbol 符号	DSK 22W	DSK 23W	DSK 24W	DSK 25W	DSK 26W	DSK 27W	DSK 28W	DSK 29W	DSK 210W	Unit 单位
Peak Reverse Voltage 反向峰值电压	V _{RRM}	20	30	40	50	60	70	80	90	100	V
DC Reverse Voltage 直流反向电压	V _R	20	30	40	50	60	70	80	90	100	V
RMS Reverse Voltage 反向电压均方根值	V _{R(RMS)}	14	21	28	35	42	49	56	63	70	V
Forward Rectified Current 正向整流电流	I _F	2								A	
Peak Surge Current 峰值浪涌电流	I _{FSM}	50								A	
Thermal Resistance J-A 结到环境热阻	R _{θJA}	85								°C/W	
Junction/Storage Temperature 结温/储藏温度	T _{J,T_{stg}}	-50to+150°C								°C	

■Electrical Characteristics 电特性

(TA=25°C unless otherwise noted 如无特殊说明, 温度为 25°C)

Characteristic 特性参数	Symbol 符号	DSK22W- DSK25W	DSK26W- DSK27W	DSK28W- DSK210W	Unit 单位	Condition 条件
Forward Voltage 正向电压	V _F	0.55	0.70	0.85	V	I _F =2A
Reverse Current 反向电流	I _R (25°C) (100°C)	0.5 5	0.3 3	mA	V _R =V _{RRM}	
Diode Capacitance 二极管电容	C _D	220	80	pF	V _R =4V, f=1MHz	

■Typical Characteristic Curve 典型特性曲线

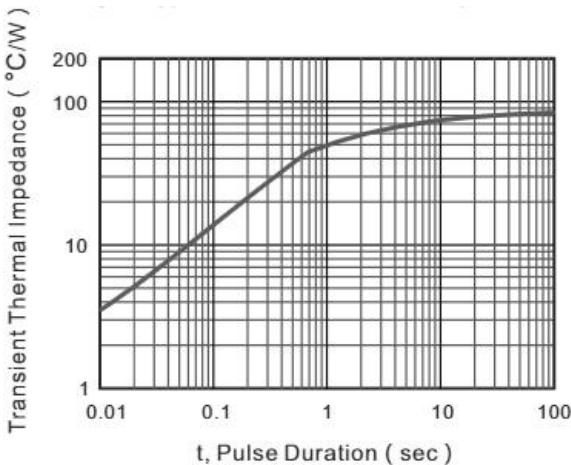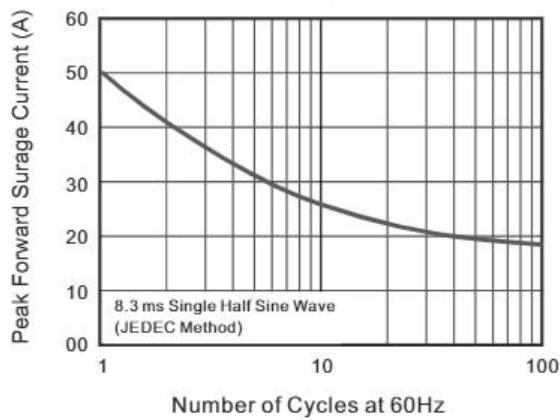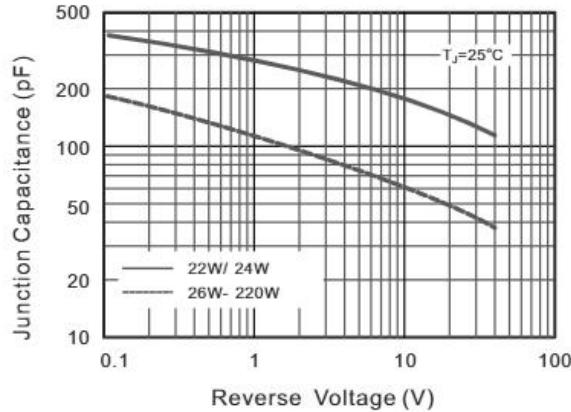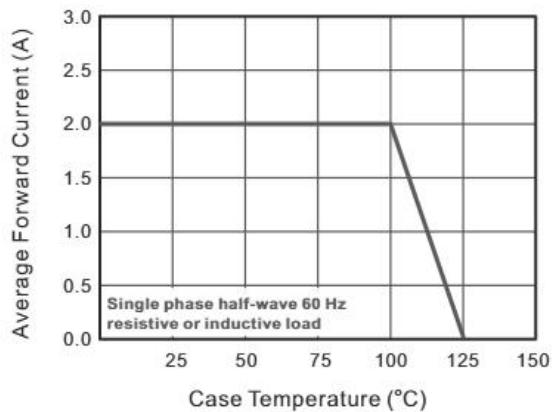

■SOD-123FL Dimension 外形封装尺寸 Unit in millimeters 单位: 毫米

