


SOD-123 General Purpose Rectifier Diode 通用整流二极管

■Features 特点

Low forward voltage drop 低正向压降
Low reverse leakage current 低反向漏电流
High surge current capability 高浪涌电流能力
Surface mount device 表面贴装器件
Case 封装:SOD-123



■Maximum Rating 最大额定值

($T_A=25^{\circ}\text{C}$ unless otherwise noted 如无特殊说明, 温度为 25°C)

Characteristic 特性参数	Symbol 符号	1A	2A	3A	4A	5A	6A	7A	Unit 单位
Peak Reverse Voltage 反向峰值电压	V_{RRM}	50	100	200	400	600	800	1000	V
DC Reverse Voltage 直流反向电压	V_R	50	100	200	400	600	800	1000	V
RMS Reverse Voltage 反向电压均方根值	$V_{R(RMS)}$	35	70	140	280	420	560	700	V
Forward Rectified Current 正向整流电流	I_F	1							A
Peak Surge Current 峰值浪涌电流	I_{FSM}	25							A
Thermal Resistance J-A 结到环境热阻	$R_{\theta JA}$	35							$^{\circ}\text{C}/\text{W}$
Junction and Storage Temperature 结温和储藏温度	T_J, T_{stg}	$150^{\circ}\text{C}, -55^{\circ}\text{C to } +150^{\circ}\text{C}$							

■Electrical Characteristics 电特性

($T_A=25^{\circ}\text{C}$ unless otherwise noted 如无特殊说明, 温度为 25°C)

Characteristic 特性参数	Symbol 符号	Min 最小值	Typ 典型值	Max 最大值	Unit 单位	Test Condition 测试条件
Forward Voltage 正向电压	V_F		0.92 0.98	1.1	V	$I_F=0.5\text{A}$ $I_F=1\text{A}$
Reverse Current($T_A=25^{\circ}\text{C}/$) 反向电流($T_A=100^{\circ}\text{C}/$)	I_R			5 50	μA	$V_R=V_{RRM}$
Diode Capacitance 二极管电容	C_D		15		pF	$V_R=4\text{V}, f=1\text{MHz}$

■ Typical Characteristic Curve 典型特性曲线

Fig.1 Forward Current Derating Curve

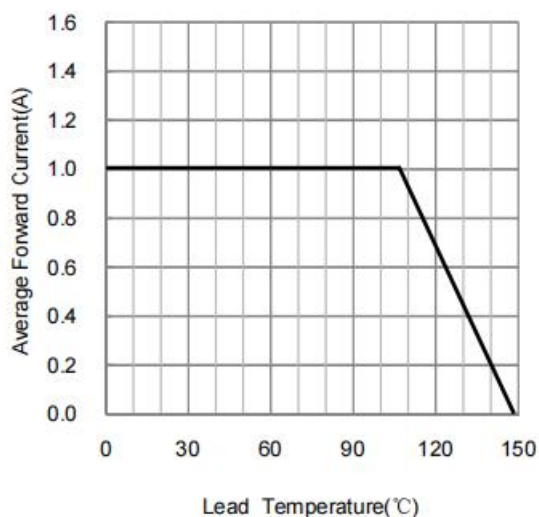


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

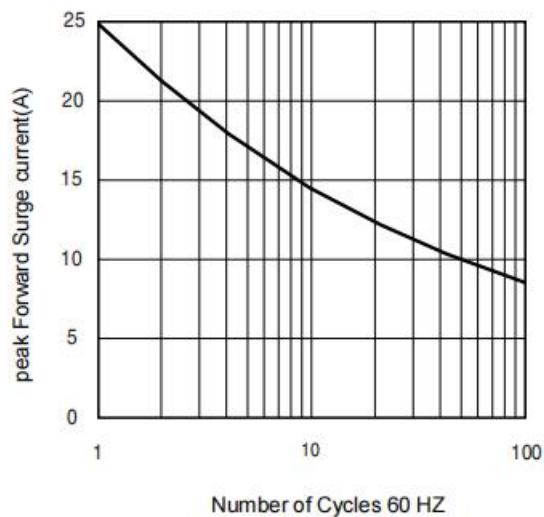


Fig.3 Typical Instantaneous Forward Characteristics



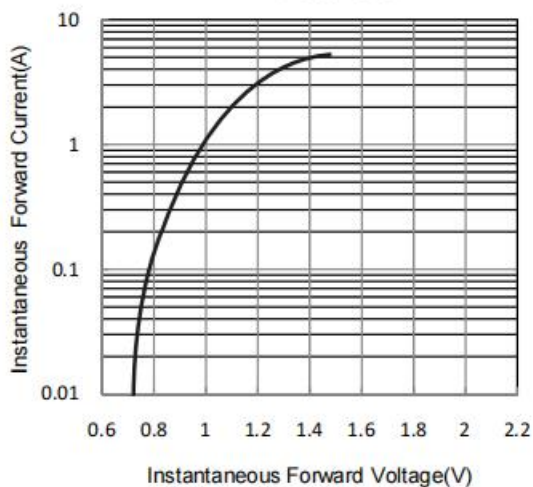


Fig.4 Typical Reverse Leakage Characteristics

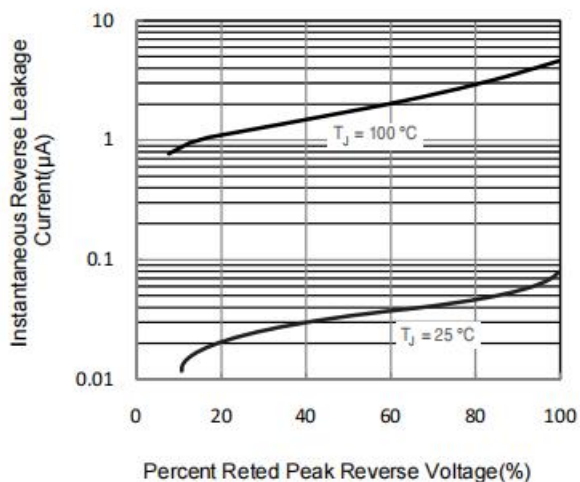

■Dimension 外形封装尺寸

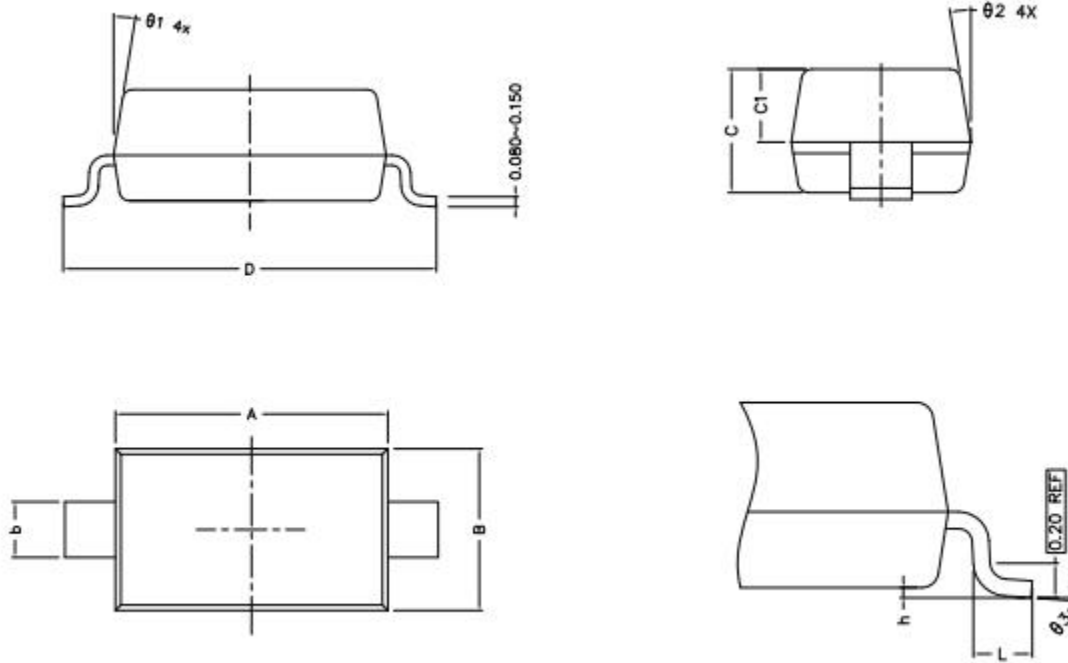

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.600	2.800	0.102	0.110
B	1.500	1.700	0.059	0.067
C	1.050	1.150	0.041	0.045
C1	0.600	0.700	0.024	0.028
D	3.550	3.850	0.140	0.152
L	0.250	0.450	0.010	0.018
b	0.450	0.650	0.018	0.026
h	0.020	0.120	0.001	0.005
⊖ 3	0°	7°	0°	7°