


Bridge Rectifier Diode 整流桥

■Features 特点

Glass passivated chip junction 玻璃钝化结
High surge current capability 高浪涌电流能力
Ideal for PCB 适用于印刷电路板
Solder dip 275°C 7S 焊接 275 度 7 秒内
Package 封装: GBJ



■Maximum Rating 最大额定值

($T_A=25^{\circ}\text{C}$ unless otherwise noted 如无特殊说明, 温度为 25°C)

Characteristic 特性参数	Symbol 符号	GBJ 15005	GBJ 1501	GBJ 1502	GBJ 1504	GBJ 1506	GBJ 1508	GBJ 1510	Unit 单位
Peak Reverse Voltage 反向峰值电压	V_{RRM}	50	100	200	400	600	800	1000	V
DC Reverse Voltage 直流反向电压	$V_{R(DC)}$	50	100	200	400	600	800	1000	V
RMS Reverse Voltage 反向电压均方根值	$V_{R(RMS)}$	35	70	140	280	420	560	700	V
Forward Rectified Current 正向整流电流	I_F	15 (With 300X300X1.6mm Heat sink 带散热)							A
Forward Rectified Current 正向整流电流	I_F	3.2 ($T_C=100^{\circ}\text{C}$ Without Heat sink 不带散热)							A
Peak Surge Current 峰值浪涌电流	I_{FSM}	240							A
Thermal Resistance J-C 结到散热壳热阻	$R_{\theta JC}$	0.8							$^{\circ}\text{C}/\text{W}$
Junction and Storage Temperature 结温和储藏温度	T_J, T_{stg}	$150^{\circ}\text{C}, -55^{\circ}\text{C}$ to $+150^{\circ}\text{C}$							

■Electrical Characteristics 电特性

($T_A=25^{\circ}\text{C}$ unless otherwise noted 如无特殊说明, 温度为 25°C)

Characteristic 特性参数	Symbol 符号	Min 最小值	Typ 典型值	Max 最大值	Unit 单位	Condition 条件
Forward Voltage 正向电压	V_F			1.05	V	$I_F=3\text{A}$
Reverse Current($T_A=25^{\circ}\text{C}$) 反向电流($T_A=125^{\circ}\text{C}$)	I_R			10 500	μA	$V_R=V_{RRM}$
Diode Capacitance 二极管电容	C_D		60		pF	$V_R=4\text{V}, f=1\text{MHz}$

■ Typical Characteristic Curve 典型特性曲线

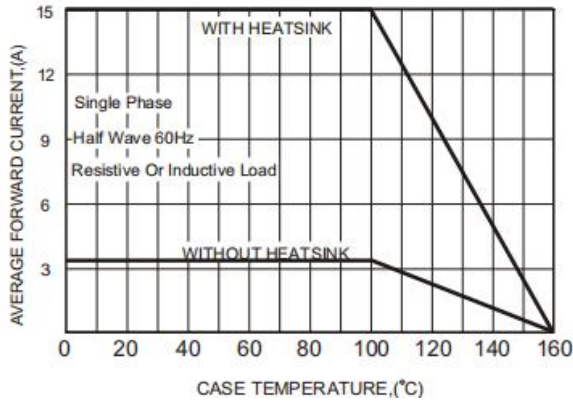


Figure 1: Forward Current Derating Curve

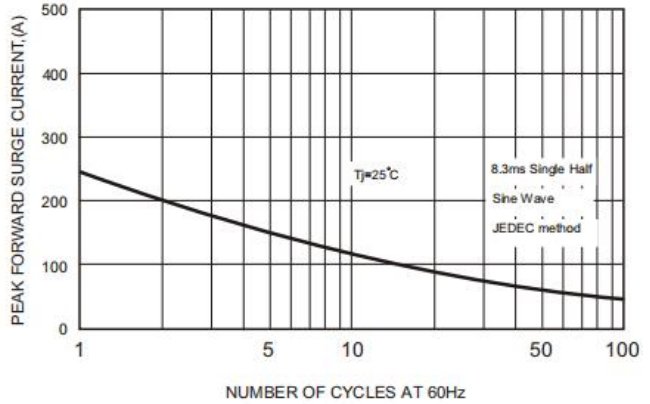


Figure 2: Peak Forward Surge Current

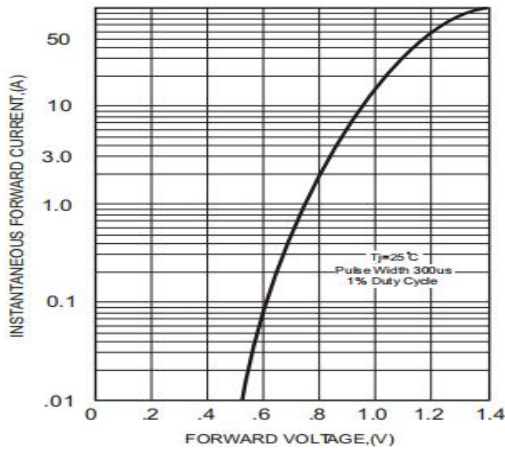


Figure 3: Instantaneous Forward Characteristics

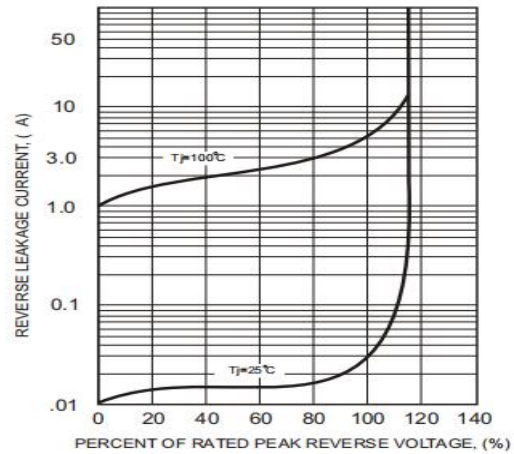


Figure 4: Reverse Leakage Characteristics

■ Dimension 外形封装尺寸

GBJ Dimensions in inches and (millimeters)

