

**SMA Schottky Barrier Rectifier Diode 肖特基势垒整流二极管**

■ **Features 特点**

Low forward voltage drop 低正向压降  
High current capability 高电流能力  
Surface mount device 表面贴装器件  
Case 封装:SMA(DO-214AC)



■ **Maximum Rating 最大额定值**

( $T_A=25^{\circ}\text{C}$  unless otherwise noted 如无特殊说明, 温度为  $25^{\circ}\text{C}$ )

Characteristic 特性参数	Symbol 符号	SS215	SS220	Unit 单位
Marking 印字		SS215	SS220	
Peak Reverse Voltage 反向峰值电压	$V_{RRM}$	150	200	V
DC Reverse Voltage 直流反向电压	$V_R$	150	200	V
RMS Reverse Voltage 反向电压均方根值	$V_{R(RMS)}$	105	140	V
Forward Rectified Current 正向整流电流	$I_F$	2		A
Peak Surge Current 峰值浪涌电流	$I_{FSM}$	50		A
Thermal Resistance J-L 结到管脚热阻	$R_{\theta JL}$	12		$^{\circ}\text{C}/\text{W}$
Junction Temperature 结温	$T_J$	175		$^{\circ}\text{C}$
Storage Temperature 储藏温度	$T_{stg}$	-65to+175 $^{\circ}\text{C}$		$^{\circ}\text{C}$

■ **Electrical Characteristics 电特性**

( $T_A=25^{\circ}\text{C}$  unless otherwise noted 如无特殊说明, 温度为  $25^{\circ}\text{C}$ )

Characteristic 特性参数	Symbol 符号	Max 最大值	Unit 单位	Condition 条件
Forward Voltage 正向电压	$V_F$	0.92	V	$I_F=2\text{A}$
Reverse Current 反向电流	$I_R(25^{\circ}\text{C})$ $(100^{\circ}\text{C})$	0.02 2	mA	$V_R=V_{RRM}$
Diode Capacitance 二极管电容	$C_D$	170	pF	$V_R=4\text{V}, f=1\text{MHz}$

■ Typical Characteristic Curve 典型特性曲线

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

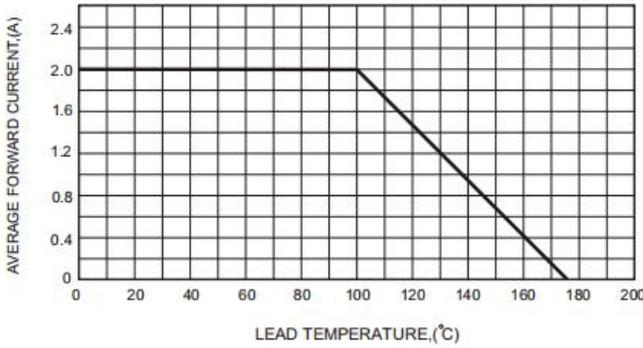


FIG.2-TYPICAL FORWARD CHARACTERISTICS

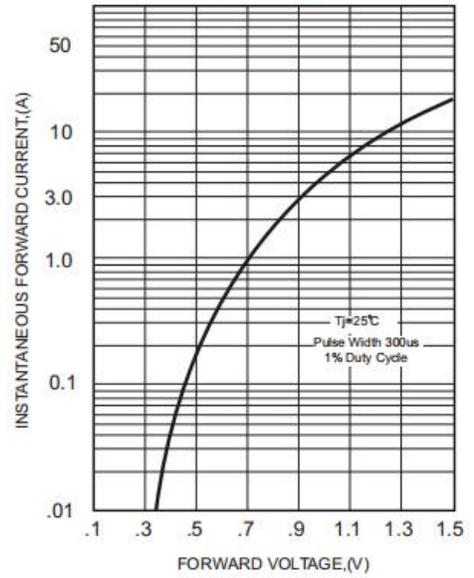


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

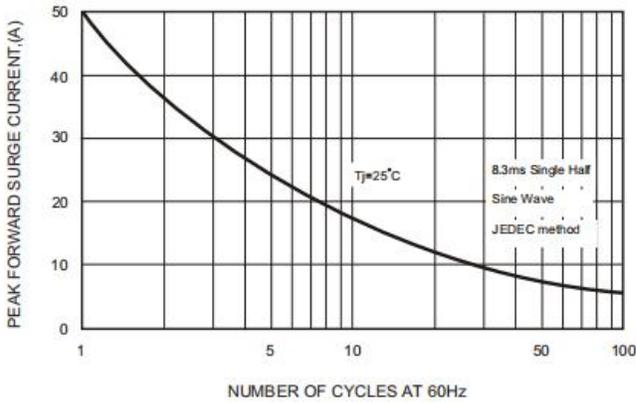


FIG.5 - TYPICAL REVERSE CHARACTERISTICS



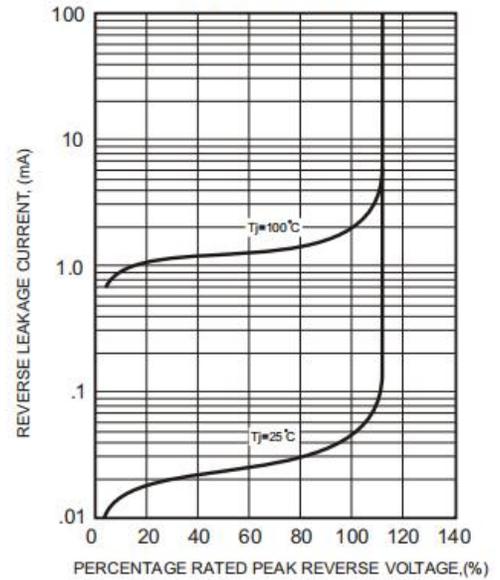


FIG.4-TYPICAL JUNCTION CAPACITANCE

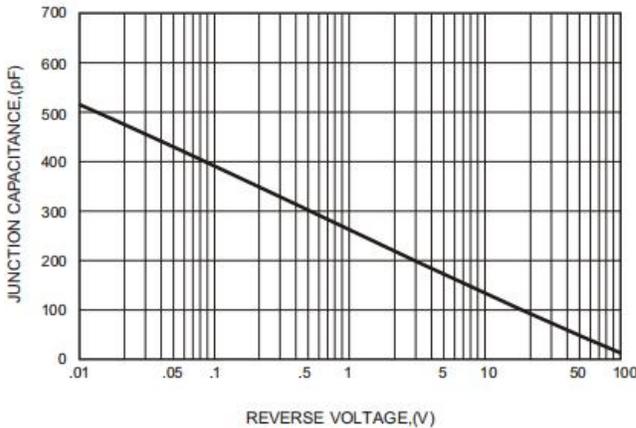

■ Dimension 外形封装尺寸

**DO-214AC(SMA)**

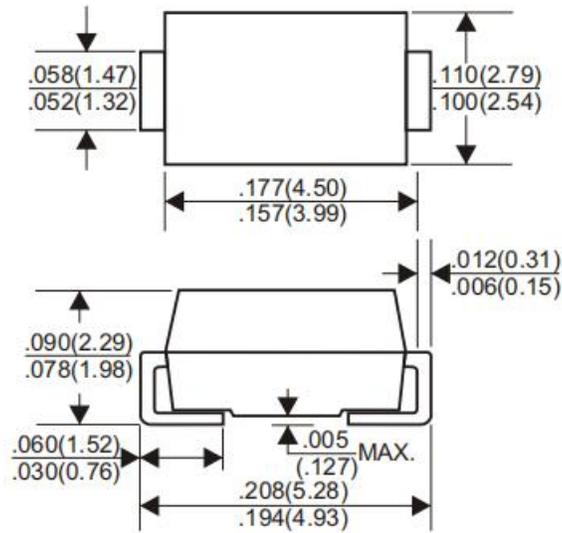

Dimensions in inches and (millimeters)